



SECTION A-A

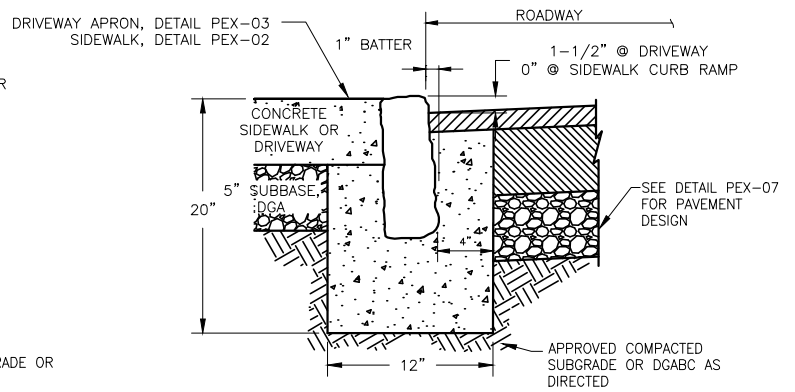

SECTION B-B

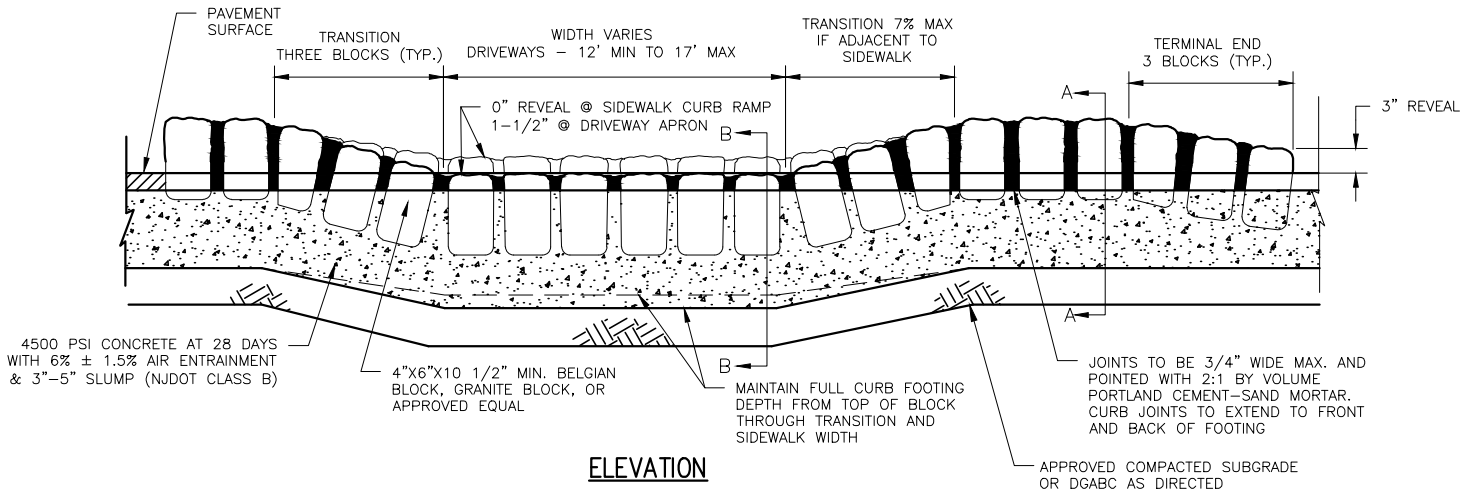

ELEVATION

NOTES:

1. **INSPECTION** - THE MUNICIPAL ENGINEER MAY INSPECT ALL WORK
 - A. CONTACT THE ENGINEER TO SCHEDULE AN INSPECTION(S) PRIOR TO:
 - POURING CONCRETE - ENGINEER TO INSPECT ALL FORMWORK.
 - B. PROVIDE THE ENGINEER COPY(S) OF DELIVERY TICKETS FOR ALL REDI-MIX MATERIALS. TICKET SHALL STATE MATERIAL(S) NAME AND WEIGHT(S).
2. **STONE MATERIALS**
 - A. BELGIAN BLOCK - QUARRY SPLIT, GRAY COLOR (MATCH EXISTING), ROUGH (SPLIT) FACE ON ALL SIDES.
 - B. USE FULL SIZE BLOCKS AT ALL LOCATIONS. BROKEN BLOCKS WILL NOT BE PERMITTED.
3. **SUBGRADE** - UNSUITABLE / UNSTABLE SUBGRADE TO BE REMOVED AND REPLACED WITH APPROVED MATERIAL.
4. **FORMS** - USED FOR ALL FACES OF CURB. FORM(S) SHALL BE THE FULL DEPTH OF CONCRETE.
5. **JOINTS** - CLEAN AND DAMPEN JOINTS PRIOR TO POINTING
6. **GRADE** - FINISHED CURB SHALL NOT VARY FROM PRESCRIBED LINE AND GRADE MORE THAN 1/4" AT ANY POINT.
7. **COLD WEATHER PERIODS** - CONTRACTOR SHALL PROVIDE MEASURES TO MAINTAIN THE CONCRETE TEMPERATURE BETWEEN 40°F AND 80°F.



PRINCETON, NEW JERSEY ENGINEERING DEPARTMENT

TYPICAL CONSTRUCTION DETAIL

CURB - BELGIAN BLOCK

SCALE: N.T.S.

DATE: SEPT. 2018

STD. DWG. NO.: PEX-05