



SECTION A-A

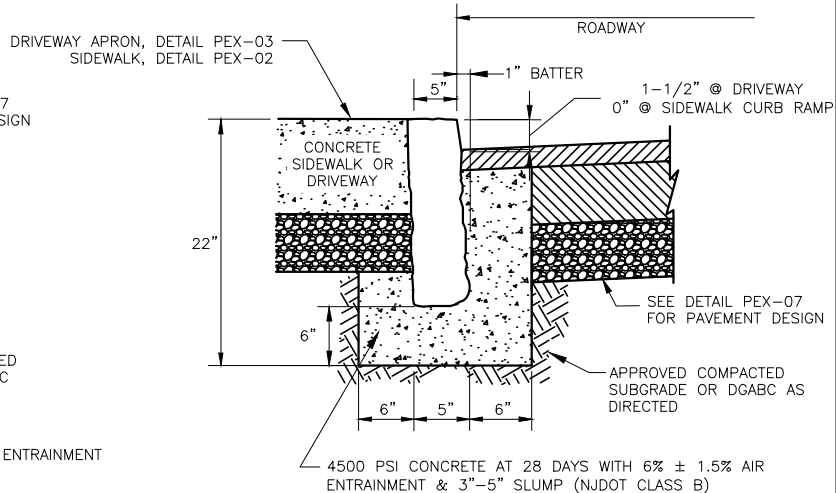

SECTION B-B

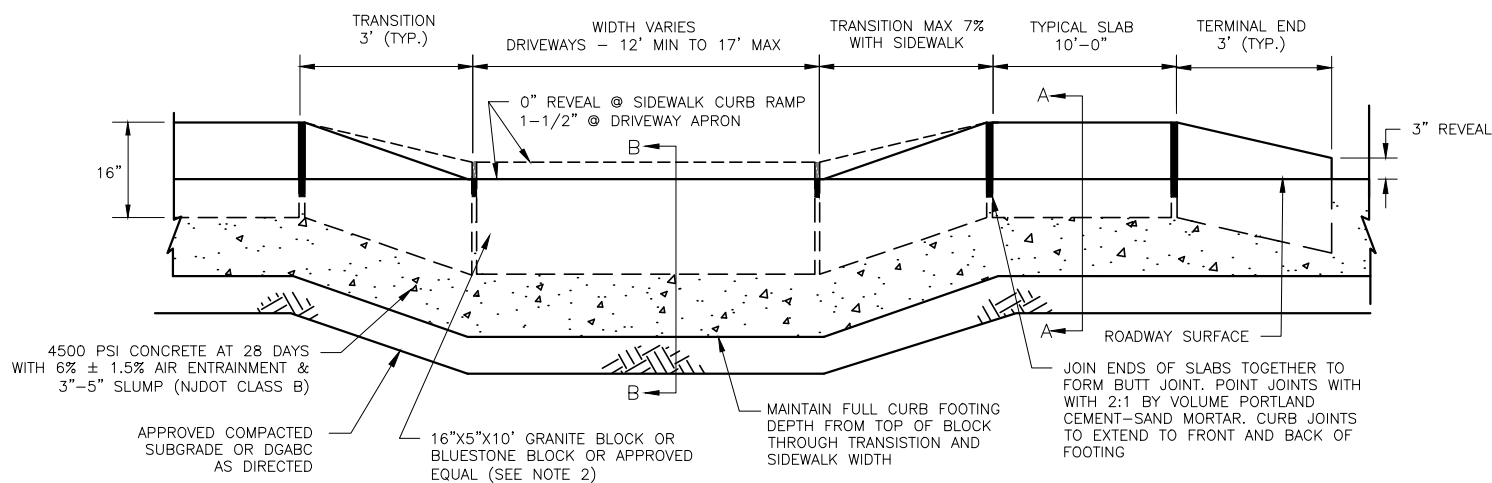

ELEVATION

NOTES:

1. INSPECTION - THE MUNICIPAL ENGINEER MAY INSPECT ALL WORK
 - A. CONTACT THE ENGINEER TO SCHEDULE AN INSPECTION(S) PRIOR TO:
POURING CONCRETE - ENGINEER TO INSPECT ALL FORMWORK.
 - B. PROVIDE THE ENGINEER COPY(S) OF DELIVERY TICKETS FOR ALL REDI-MIX MATERIALS. TICKET SHALL STATE MATERIAL(S) NAME AND WEIGHT(S).
2. STONE MATERIALS
 - A. GRANITE - QUARRY SPLIT, GRAY COLOR (MATCH EXISTING), SMOOTH (SAWN) TOP FACE, ROUGH (SPLIT) VERTICAL FACE
 - B. BLUESTONE - QUARRY SPLIT, BLUE/GREY COLOR (MATCH EXISTING), SMOOTH (SAWN) TOP FACE, ROUGH (SPLIT) VERTICAL FACE
 - C. USE FULL SIZE BLOCKS AT ALL LOCATIONS. BROKEN BLOCKS WILL NOT BE PERMITTED.
3. SUBGRADE - UNSUITABLE / UNSTABLE SUBGRADE TO BE REMOVED AND REPLACED WITH APPROVED MATERIAL.
4. FORMS - USED FOR ALL FACES OF CURB. FORM SHALL BE THE FULL DEPTH OF CONCRETE.
6. JOINTS - CLEAN AND DAMPEN JOINTS PRIOR TO POINTING
7. GRADE - FINISHED CURB SHALL NOT VARY FROM PRESCRIBED LINE AND GRADE MORE THAN 1/4" AT ANY POINT.
8. COLD WEATHER PERIODS - CONTRACTOR SHALL PROVIDE MEASURES TO MAINTAIN THE CONCRETE TEMPERATURE BETWEEN 40°F AND 80°F.



PRINCETON, NEW JERSEY ENGINEERING DEPARTMENT

TYPICAL CONSTRUCTION DETAIL

CURB - GRANITE

SCALE: N.T.S.

DATE: SEPT. 2018

STD. DWG. NO.: PEX-06